
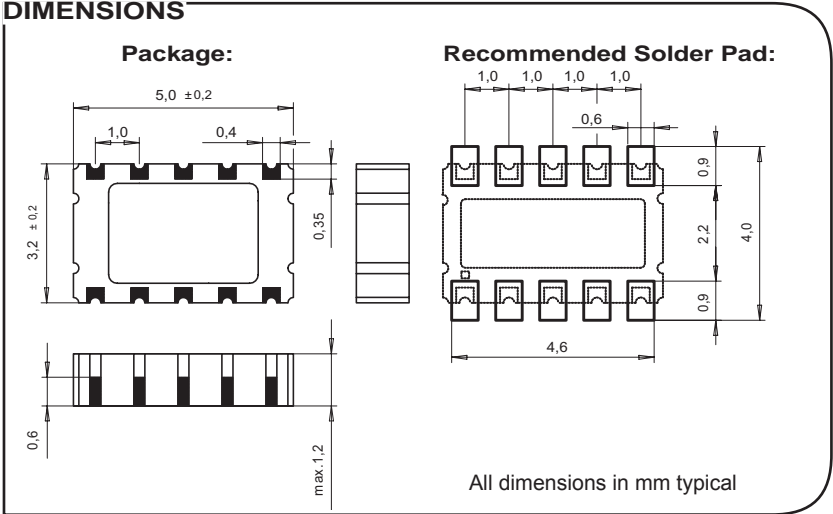


# RV-3029-C2

## Real Time Clock Module with I<sup>2</sup>C-Bus

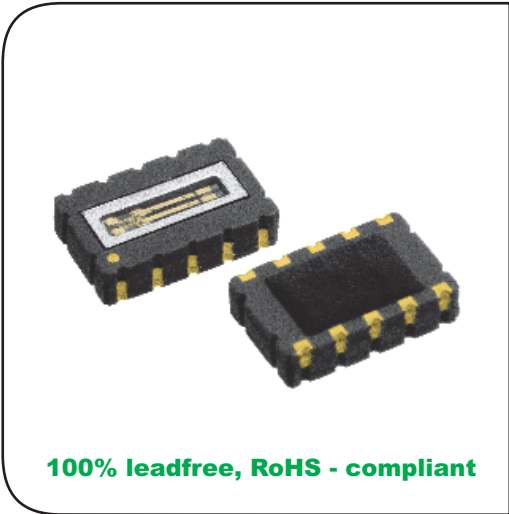

**Extremely Accurate RTC Module with embedded Xtal. I<sup>2</sup>C Interface**  
**Temperature Compensation AEC Q200 Rev. C compliant**

Option A: Temperature	Calibrated Time Deviation	
@ +25°C	± 0.26 s/day	± 3ppm
0°C to +50°C	± 0.35 s/day	± 4ppm
-10°C to +60°C	± 0.44 s/day	± 5ppm
-40°C to +85°C	± 0.52 s/day	± 6ppm
-40°C to +125°C	± 0.70 s/day	± 8ppm

Option B: Temperature	Default Time Deviation	
@ +25°C	± 0.26 s/day	± 3ppm
0°C to +50°C	± 0.44 s/day	± 5ppm
-10°C to +60°C	± 0.87 s/day	± 10ppm
-40°C to +85°C	± 2.17 s/day	± 25ppm
-40°C to +125°C	± 2.60 s/day	± 30ppm

### DESCRIPTION:


The RV-3029-C2 is a Real-Time-Clock Module with embedded Crystal. This RTC has an I<sup>2</sup>C Bus (2-wire Serial-Interface) and offers temperature compensated time. The STC-Smart Temperature Compensation is calibrated in the factory and leads to a very high time-accuracy of ± 6ppm from -40°C to +85°C and ± 8ppm from -40°C to +125°C.

Beside standard RTC functions, it includes a Backup-Battery Input with internal switchover function, a programmable Trickle-charge circuitry, an integrated Temperature Sensor with digital-output and offers 8 Bytes RAM and 2 Bytes EEPROM for customer's application.

The calendar function tracks year and leap -year flags. The clock tracks second, minute and hour in 24-hour format. Programmable alarm setting and universal timer functions increase flexibility.

For pick-and-place equipment, the parts are available in 12 mm tape:  
 7" (178 mm) reel with 1'000 parts  
 13" (330 mm) reel with 5'000 parts

### BLOCKDIAGRAM:

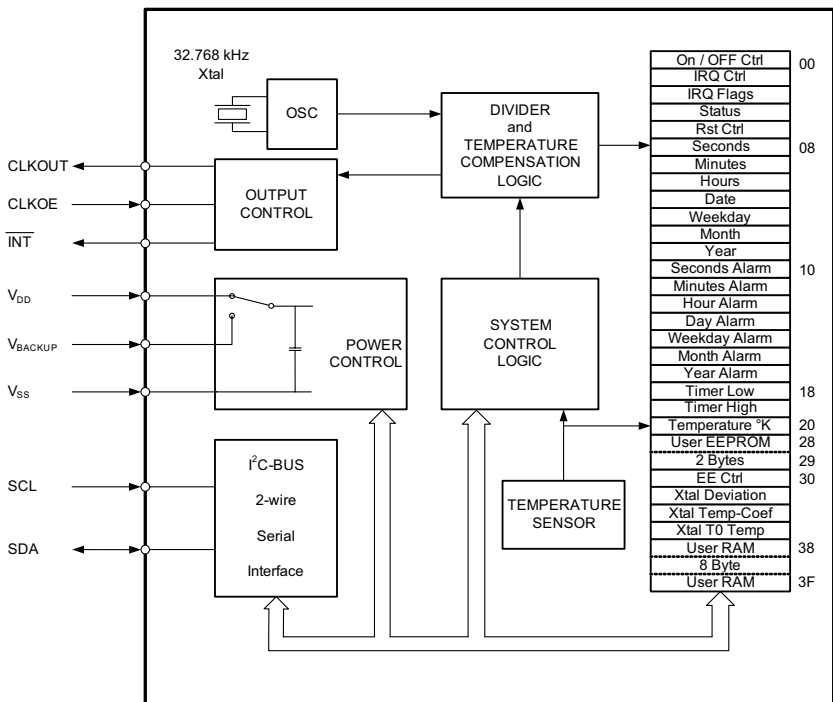

**ELECTRICAL CHARACTERISTICS  
AT 25°C:**

	Symbol	Condition	Min.	Typ.	Max	Unit
Supply voltage	V <sub>DD</sub>	Time keeping	1.3		5.5	V
Supply voltage	V <sub>DD</sub>	Temp. comp.	1.8		5.5	V
Current consumption	I <sub>DDO</sub>	V <sub>DD</sub> = 3V		800	1000	nA
CLKOUT frequency		Progr.	32.768/1024/32/1			Hz
Frequency Tolerance	ΔF/F	@ 25°C		±10	±20	ppm
Freq.vs.Temp.	ΔF/F <sub>TOPR</sub>	20 ≤ T <sub>0</sub> ≤ 30	-0.035 ppm/°C² (T - T <sub>0</sub> )² ±10%			ppm
Aging first year	ΔF/F	@ 25°C			± 3	ppm
Time accuracy Opt. A	Δt/t	@ 25°C			±0.26	s/day
		-40 to +85°C			±0.52	s/day
Time accuracy Opt. B	Δt/t	@ 25°C			±0.26	s/day
		-40 to +85°C			±2.17	s/day


**ENVIRONMENTAL  
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
Industrial operating temp. range		-40 to +85°C	
Extended operating temp. range		-40 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	± 5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	± 5 ppm

**PACKAGE, TERMINATIONS AND  
PROCESSING:**

Package-Type	Termination	Processing
SON 10-pin	For SMD mounting Au flashed pads	Reflow soldering 260°C/20 s max.

**FREQUENCY TEMPERATURE  
CHARACTERISTICS:**

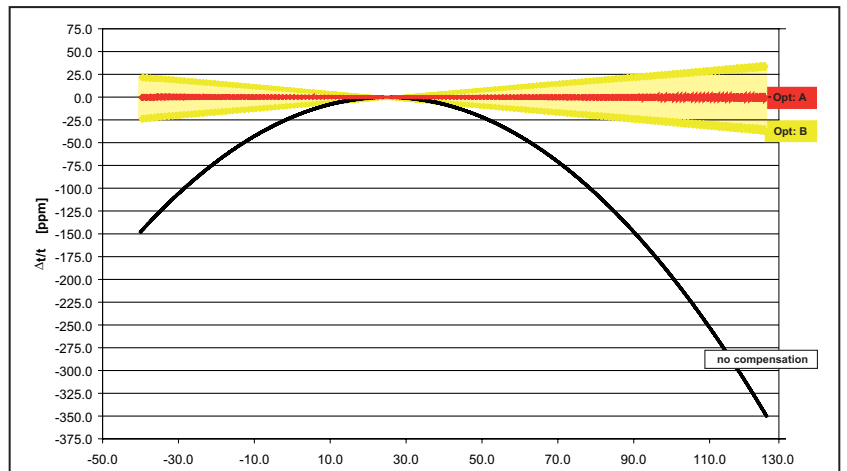

**PIN CONNECTIONS  
TOP VIEW:**

	Pin	Connection
	1	V <sub>DD</sub> Power Supply Voltage
	2	CLKOUT Frequency Output
	3	N.C. not connected
	4	SCL Serial Clock Input
	5	SDA Serial Data
	6	V <sub>SS</sub> Ground
	7	INT Interrupt Output
	8	V <sub>BACKUP</sub> Backup Supply Voltage
	9	N.C. not connected
10	CLKOE CLK Output Enable	

All specifications subject to change without notice. 05.10



Micro Crystal AG  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland

Tel. +41 32 655 82 82  
Fax +41 32 655 82 83  
sales@microcrystal.ch  
www.microcrystal.com